

CHECK VALVE

1/8" - 2" NPT

0 - 4500 Psig

**CV
SERIES**

Description

High flow, zero leak, low pressure drop check valve suitable for most fluid and gas applications. Fully guided poppet with free floating O'ring design is extremely tolerant of particulate contamination. A metal to metal positive stop in both the open and checked position protects O'ring and spring from over-stress fatigue. Zero external leakage is achieved by the utilization a staic O'ring seal with TFE backup ring. When specified with the proper seal material, these valves are ideally suited to cryogenic system applications.



Technical Data

- Nominal Crack Pressures: .15, 1, 3 & 8 Psig (0.01, 0.07, 0.21 & 0.55 bar)
- Leakage: Zero to maximum operating pressure. TFE seals may require back pressure to seal leak-tite.
- Temperature Rating: -320°F to 450°F (-195°C to 232°C) *based on seal material*
- Maximum Operating Pressures to 300°F (149°C)

Pipe Size	Brass Psig(bar)	Carbon Steel Psig(bar)	303 Stainless Steel Psig(bar)	316 Stainless Steel Psig(bar)
1/8" - 1"	3000(206)	3000(206)	4500(310)	
1-1/4" & 1- 1/2"		Non standard, consult factory		
2"	1500(103)			


Materials of Construction

Component	Valve Body Material			
	Brass	Carbon	303 SS	316 SS
Inlet Cap, Outlet Body, Poppet, Spring Retainer	Brass ASTM B16	Carbon Steel, ASTM A108, Zinc & Black Plated per ASTM B633	303 SS, ASTM A582 ²	316 SS, ASTM A479 ²
Dynamic O'Ring ¹	Buna-N		Viton™	
Static O'Ring ¹				
Backup Ring	Virgin TFE			
Spring	302 SS, ASTM A313			

¹ Lubricated with Krytox™ GPL-202

² PTFE Dry lubricant applied to threads

SERIES CV CHECK VALVE

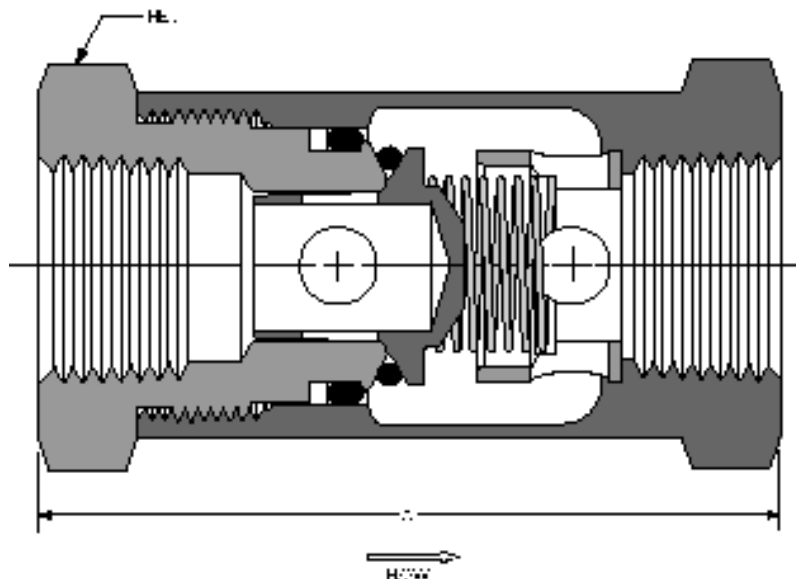

Dimensional/Flow Data

Pipe Size (NPT)	A (inches)	Hex	Cv	Flow at 5.0 Psid (SCFM)
1/8"	1.70	7/8"	1.7	35
1/4"	2.25	1"	3.0	60
3/8"	2.43	1 - 1/4"	3.9	80
1/2"	2.93	1 - 1/2"	7.4	150
3/4"	3.37	1 - 3/4"	11.4	280
1"	3.99	2"	14.2	380
1 - 1/4"	4.50	2 - 3/4"	26.8	700
1 - 1/2"	5.35			
2"	6.10	3 - 1/2" Round ¹	51.0	1200

¹ Machined from 3-1/2" round stock with 2-3/4" wrench flats.
Flow Tested in accordance with ISA S75.02 with air. Restrictions in the inlet or outlet piping may reduce flow.

Ordering Information

CV - 500 B - V - 3

<p>SERIES ———</p> <p>CV - Check Valve</p> <p>PIPE SIZE (NPT) ———</p> <p>125 - 1/8" 250 - 1/4" 375 - 3/8" 500 - 1/2" 750 - 3/4" 1000 - 1" 1250 - 1-1/4" (brass only) 1500 - 1-1/2" (brass only) 2000 - 2" (brass only) <small>NPT threads per ANSI/ASME B1.20.1</small></p> <p>MATERIAL CODE ———</p> <p>B - Brass (1/8" - 2") S - 303SS (1/4" - 1") SS - 316SS (1/8" - 1") C - Carbon Steel (1/4" - 1")</p>	<p>CRACK PRESSURES</p> <p>.15 - (.1 - .4 Psig) (0.01 bar) 1 - (.5 - 1 Psig) (0.07 bar) 3 - (2 - 4 Psig) (0.21 bar) 8 - (6 - 10 Psig) (0.55 bar)</p> <p>SEAL MATERIAL</p> <p>V - Viton™, -20°F to 375°F (-29°C to 190°C) B - Buna-N, -40°F to 250°F (-40°C to 121°C) N - Neoprene, -40°F to 300°F (-40°C to 148°C) EP - Ethylene Propylene, -65°F to 300°F (-54°C to 148°C) FS - Fluorosilicone, -80°F to 350°F (-62°C to 176°C) S - Silicone, -70°F to 450°F (-56°C to 232°C) T - TFE, -320°F to 350°F (-195°C to 177°C)</p> <p>OPTIONS</p> <p>Oxygen cleaning, cryogenic service, Dual Ferrule Tube and other thread configurations, consult factory</p> <p style="text-align: right;"><small>Viton, Krytox -™ Dupont</small></p>
---	---

PROPER COMPONENT SELECTION - When specifying a component, the total system design must be considered to ensure safe and trouble-free performance. Intended component function, materials compatibility, pressure ratings, installation, environment and maintenance are the responsibility of the system designer.



www.generant.com

1865 Route 23 South PO Box 768 Butler, New Jersey 07405 973.838.6500 Fax 973.838.4888